

Everything's possible.

Xerox® PrimeLink® C9265 / C9275 / C9281 Printer



It's time to embrace agility.

When requests change by the minute, you need a printer that makes everything possible—luxury output, countless options for office and production-level feeding and finishing, with speedy, effortless workflows that help work get done faster. That's the all-new Xerox® PrimeLink® C9200 Series Printer.

NOW ANYONE CAN PRINT

LIKE A PRO

You'll do more with PrimeLink®, a new light production engine that promises more power with print speeds up to 81 prints per minute. Whether you run an office or agency, university or print production shop, PrimeLink® is ready to enhance your image with seamless support and the widest breadth of capabilities in the light production market.



LUXURY OUTPUT QUALITY

Image quality beyond what you'd expect from an office printer, with high definition, highly engaging color output. Plus:

Crisp, rich black text and pristine full-gamut color graphics with High Definition Emulsion Aggregate (HD EA) Toner

Optimized 0.5 mm front-to-back registration to keep all your content right where you want it

More stable and accurate quality with new energy-efficient LED print technology providing 2400 x 2400 dpi imaging

Accurate density and color quality with advanced Simple Image Quality Adjustment (SIQA)

Support for expanded Extra-Long Sheet (XLS) printing at greater sizes (51 in. / 1,300 mm)

Reliable envelope feeding in a wide array of sizes comes standard—no special kit required



WIDE RANGE OF FEEDING AND FINISHING

Effortless production of any run—small to large—with inline finishing on virtually any media ensures you're set up for success.

Offer more applications with more media flexibility up to 400 gsm, and sizes up to 51 in. / 1,300 mm

Optimize your printer for every job with Custom Stock Libraries

Get big capability and productivity in a space-saving footprint

A PRINTER SO FUN TO USE, WORK WON'T FEEL LIKE WORK

When it comes to working better, it's all about efficiency and excellence. The new Integrated Color Server for the Xerox® PrimeLink® C9200 Series Printer delivers that and more (standard) with ready to use workflows and advanced print features, accessed via a 10 in. touchscreen for tap and print / copy / scan convenience.

The Xerox® EX and EX-i C9200 Series Print Servers Powered by Fiery® (optional) offer production tools familiar to print shops and in-printers—including a wide range of Fiery® offerings for advanced color management, job set-up and more.

SPEEDY, EFFORTLESS WORKFLOWS AND CUSTOMIZATION

Time- and talent-saving automation with the potential to transform your workflows—and your working environment.

Accelerate your work with Xerox® FreeFlow® Core and other FreeFlow® Workflow Software solutions

Monitor, measure and manage your printer or entire fleet with Xerox® FreeFlow® Vision Software

Connect and create with the Connect for XMPie app for creative new applications, including preloaded templates for personalization

Seamlessly print from any device with support for mobile printing with Xerox® @PrintByXerox App

SUPER-SECURE FROM TODAY'S—AND TOMORROW'S—THREATS

With dozens of security features and certifications, PrimeLink® is ready to meet and exceed your organization's protocols. Our multi-layered approach to security is designed around three principles to ensure ongoing protection and ensure compliance, whatever your field or industry.

All-new-from-the-ground-up Xerox® PrimeLink® C9200 Series Printer



Shown: Fiery® EX Print Server, Two-Tray Oversized High Capacity Feeder, Xerox® PrimeLink® C9200 Series Printer, Crease and Two-Sided Trimmer, Xerox® Production Ready Booklet Maker Finisher, Xerox® SquareFold® Trimmer



Speeds:
65 / 75/ 81 ppm



Media weights:
Up to 400 gsm



Banner media:
Up to 51 in. / 1,300 mm



Standard (5 tray) capacity:
3,500 sheets with optional
One-Tray Oversized High
Capacity Feeder (OHCF);
7,500 sheets with
Two-Tray OHCF

1 Optional One- or Two-Tray Oversized High Capacity Feeders (OHCF)

2 Tray 5 (MSI / Bypass Tray)

3 Remote User Interface

4 Smart Proximity Sensor

**5 Dual-Head Color Scanner
up to 270 ipm**

6 Standard Trays 1-5

**7 Optional Xerox® EX or EX-i C9200 Series
Print Servers Powered by Fiery®**

**8 Standard Integrated Color Server for the
Xerox® PrimeLink® C9200 Series Printer**

**9 High Definition Emulsion Aggregate
(HD EA) Toner**

10 LED Print Technology

11 Intelligent / Advanced Decurler


12 Registration 0.5 mm front-to-back

13 Custom Stock Library

14 Redesigned Paper Path

15 Crease and Two-Sided Trimmer

**16 Multiple finishing options
for production print and
office environments**

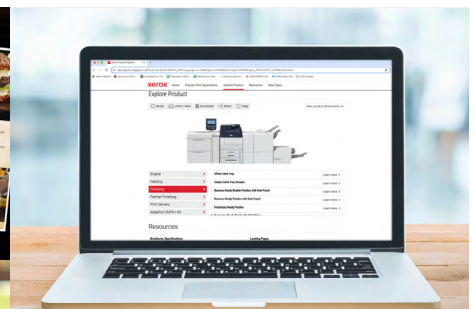

**We make it easy
to make it yours.**
Auto-configure
your perfect press
with our Product
Explorer tool.



Xerox® PrimeLink® C9265 / C9275 / C9281 Printer

DEVICE SPECIFICATIONS		PRIMELINK C9265		PRIMELINK C9275		PRIMELINK C9281	
SIMPLEX SPEEDS		Color	Black-and-white	Color	Black-and-white	Color	Black-and-white
8.5 x 11 in. / A4		Up to 65 ppm	Up to 65 ppm	Up to 75 ppm	Up to 75 ppm	Up to 81 ppm	Up to 81 ppm
11 x 17 in. / A3		Up to 34 ppm	Up to 34 ppm	Up to 37 ppm	Up to 37 ppm	Up to 42 ppm	Up to 42 ppm
12 x 18 in. / SRA3		Up to 30 ppm	Up to 30 ppm	Up to 34 ppm	Up to 34 ppm	Up to 38 ppm	Up to 38 ppm
Printer Dimensions		Height: 45.4 in. / 1,154 mm; Width: 62 in. / 1,575 mm; Depth: 31.2 in. / 793 mm (includes Bypass Tray and Offset Catch Tray)					
Monthly Duty Cycle		Up to 300,000 pages (maximum volume capacity expected in any one month, not expected to be sustained on a regular basis)					
Average Monthly Print Volume (AMPV)		10,000 to 60,000 pages per month					
Paper Flexibility/Weights		Standard Paper Capacity: 3,500 sheets: (Tray 1 & 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1,280 sheets, Tray 5 (MSI / Bypass): 250 sheets) Max Paper Capacity: 7,500 sheets (Tray 1 & 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1,280 sheets, Tray 5 (MSI / Bypass): 250 sheets, Two-Tray Oversized High Capacity Feeder: 4,000 sheets) Sizes: Tray 1: 5.5 x 8.5 in. to 12 x 18 in. / A5 to SRA3; Tray 2: 5.5 x 8.5 in. to 11 x 17 in. / A5 to SRA3; Tray 3: 7.25 x 10.5 in., 8.5 x 11 in. / B5, A4; Tray 4: 7.25 x 10.5 in., 8.5 x 11 in. / B5, A4					
Image Quality	Print Technology	Setting a new higher benchmark for light production image quality with LED technology, 2400 x 2400 dpi resolution with advanced HD LED and HD EA Toner for exceptional clarity and vibrant rich colors					
	Line Screens	150 / 200 / 300 / 600 dot screen, 200 line screen, stochastic and enhanced text and graphics					
	Registration	- Cutting-edge registration technology for tight control - Simple Image Quality Adjustment (SIQA) for de-skew, registration and density uniformity (available on all configurations) +/- 0.5 mm. Variation will occur based on paper size, tray, etc.					
Print Features		- Print, copy, scan and fax (optional), including Scan to PC, USB or Email, and mobile printing - Expansive media range lets you print everything from postcards to posters, both coated and uncoated stock, up to 400 gsm - Xerox Extensible Interface Platform® (EIP) allows you to connect to third-party software solutions - Inline finishing options offer a professional polish with banner printing, stapling, hole punching, folding, booklet stitching, crease and three knife trimming for booklets, stitched presentations, reports and newsletters - Be secure with integrated security features such as IP filtering, image overwrite, secure print, encrypted Scan to Email, authentication and IPv6 support 51 in. / 1,295 mm XLS or Banner sheet size (Tray 5 and OHCF via Tray 5) supporting up to 220 gsm - Up to 400 gsm media weight (Tray 5 and OHCF only), auto-duplex up to 350 gsm (Bypass Tray and OHCF) - Xerox® replaceable units for toners, drums, fuser, charge corotron, waste bottle, staples - Custom Paper Setup and Paper Catalog - Load-while-run toner and paper capability - Remote UI and Smart Proximity Sensor - Optional Features: Common Access Card Enablement Kit, Accounting Options, PostScript with Integrated Color Server					
Servers		Standard - Integrated Color Server for the Xerox® PrimeLink® C9200 Series Printer Optional - Xerox® EX-i C9200 Series Print Server Powered by Fiery® (FS600 Platform) - Xerox® EX C9200 Series Print Server Powered by Fiery® (FS600 Platform)					
Integrated Scanner		- Single-pass Automatic Duplex Document Feeder - Color or black-and-white scanner - Scan to text searchable PDF, PDF/A, thumbnail preview, XPS, TIFF, JPEG 250 sheet capacity - Up to 270 ipm (color, up to 200 gsm) - Up to 270 ipm (black-and-white, up to 200 gsm) - Originals up to 11 x 17 in. / A3 in weights from 38 gsm / 16 lb. bond to 200 gsm / 53 lb. bond - Auto Document Feeder and platen glass used with SIQA (Tray to Paper registration)					
Optional Feeding		Optional High Capacity Feeder (HCF): 2,000 sheets; 7.25 x 10.5 in., 8.5 x 11 in. / 184.2 x 266.7 mm, 279.4 x 215.9 mm / B5, A4; 16 lb. bond to 60 lb. cover / 64 to 220 gsm (uncoated and coated) Optional Oversized High Capacity Feeder (OHCF): One-Tray OHCF: 2,000 sheets plus Storage Cabinet; Tray 6: 3.9 x 5.8 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 400 gsm) Tray 5: Up to 13 x 51 in. / 330 x 1300 mm up to 400 gsm (XLS up to 220 gsm) Two-Tray OHCF: 4,000 sheets; Tray 6 and 7: 3.9 x 5.8 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 400 gsm) Tray 5: Up to 13 x 51 in. / 330 x 1,300 mm up to 400 gsm (XLS up to 220 gsm)					
Optional Finishing		Business Ready Finisher 2.0: Offsetting Top Tray: 500 sheets 8.5 x 11 in. / A4 unstapled. Stacking Stapling Tray: 3,000 sheets unstapled or 100 sets (dual or 4-position staple) 11 x 17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4. Sizes: Stacking: 4 x 6 in. to 13 x 19.2 in. / A6 to SRA3, Stapling: 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3. Other: 5.5 x 8.5 in. / A5 output to top tray; punch and offset. Paper weights: Top Tray: 16 lb. bond to 110 lb. cover / 60 to 350 gsm (coated and uncoated). Stacker Tray: 16 lb. bond to 96 lb. cover / 60 to 256 gsm (coated and uncoated). Business Ready Finisher Booklet Maker Finisher 2.0: Offsetting Top Tray: 500 sheets 8.5 x 11 in. / A4 unstapled. Stacking Stapling Tray: 1,500 sheets unstapled or 200 sets (single position stapling or dual or 4-position staple) or 100 stapled sets of 11 x 17 in. / A3 / SRA3. 11x17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4. Sizes: Stacking: 4 x 6 in. to 13 x 19.2 in. / A6 to SRA3. Stapling: 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3. Other: 5.5 x 8.5 in. / A5 output to top tray; punch and offset. Paper weights: Top Tray: 16 lb. bond to 130 lb. cover / 60 to 350 gsm (coated and uncoated), Stacker Tray: 16 lb. bond to 96 lb. cover / 60 to 350 gsm (coated and uncoated). Booklet Maker: 16 lb. bond to 110 lb. cover / 256 to 300 gsm cover (uncoated, 106 to 220 gsm (coated)). Booklet Maker / Saddle-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated or 5 sheets at 177 to 220 gsm coated). Production Ready Finisher (requires Interface Decurler Module): Booklet Size: 100 sheets (90 gsm) uncoated, 35 sheets (90 gsm) coated. Paper Size: 7.2 x 5.7 in. / 182 in. x 146 mm to 11.7 x 17 in. / 297 x 432 mm. Max Weight: 350 gsm. Options: Punch, Inserter and C/Z Folder. Trays: Two output trays, 500 sheet top tray, 3,000 sheet stack tray of 5.83 x 5.75 in. / 148 x 146 mm to 13 x 19.2 in. / 330 x 488 mm. Production Ready Finisher Booklet Maker (requires Interface Decurler Module): Booklet Size: 7.17 x 7.17 in. / 182 x 182 mm to 13 x 19.2 in. / 330 x 488 mm up to 256 gsm. Trays: 500 sheet top tray, 2,000 sheet stack tray, saddle-stitch booklet tray (up to 120 pages, 30 sheets / 90 gsm uncoated, 15 sheets / 106 gsm coated). Offset Catch Tray: 500 sheet stacking. Xerox® SquareFold® Trimmer Module: Face Trim: 120 pages (30 sheets). Compatibility: Production Ready Finisher, Booklet Maker, Crease and Two-Sided Trimmer. Xerox® C/Z Folder: Sheet Size: 8.5 x 11 in. / A4. Half-Z Fold Sheet Size: Larger stocks reducing to 8.5 x 11 in. / A4. Weight Range: 64 to 90 gsm. Compatibility: Production Ready Finisher, Booklet Maker. Xerox® Inserter: Capacity: 250 sheets. Capabilities: Trimming, punching, folding, stapling, stacking. Paper Size: 7.2 x 5.8 in. / 182 x 148 mm to 13 x 19.2 in. / 330 x 488 mm. Max Weight: 350 gsm. Compatibility: Production Ready Finisher. Xerox® Crease / Two-Sided Trimmer: Trim Range: 0.236 in. / 6 mm to 0.985 in. / 25 mm. Paper Size: 7.7 x 8.3 in. / 194 x 210 mm to 13 x 19.2 in. / 330 x 488 mm. Max Weight: 350 gsm. Compatibility: Production Ready Finisher and Booklet Maker. Buffering Unit: Up to five customizable mountain or valley creases per sheet. For more optional finishing refer to Product Explorer explorexeroxproducts.com/Product.					
Xerox App Gallery		Go to xerox.com/AppGallery to learn how you can expand the capabilities of the PrimeLink C9265 / C9275 / C9281 and work in new ways with dedicated apps for business, education, healthcare and more.					

Configurations vary by geographical location.

For more information, go to xerox.com

© 2025 Xerox Corporation. All rights reserved. Xerox®, PrimeLink®, SquareFold® and Xerox Extensible Interface Platform® are trademarks of Xerox Corporation in the United States and/or other countries. The information in this brochure is subject to change without notice. 01/25 TSK-6233 BR40622 P92BR-01UA



Milwaukee: (414) 327-5010
Madison: (608) 242-7200
Email: info@bpicolor.com

xerox™