



# Lexmark CX951se

With the new CX951se color A3 multifunction printer, you get reassuring versatility, exceptional sustainability, and surprising simplicity from such sophisticated technology. Boost your productivity with vivid prints — up to 35 pages per minute\*. Intuitively navigate the 10-inch color touchscreen, and save time with single-pass two-sided scanning.

## Print Technology

Color Laser

## Function

Color Copying, Color Printing, Color Scanning, Trusted Platform Module (TPM), The Trusted Platform Module (TPM) is not available in some countries.

## Workgroup Size

Large Workgroup

## Touch Screen Display

Yes

## Display

Lexmark e-Task 10.1-inch (25.6 cm) color touch screen

## Print Speed (Letter, Black)

Up to 35 ppm<sup>4</sup>

## Print Speed (Letter, Color)

Up to 35 ppm<sup>4</sup>

## Print Speed (Letter, Black) Duplex

Up to 35 spm<sup>4</sup>

## Print Speed (Letter, Color) Duplex

Up to 35 spm<sup>4</sup>

## Time to First Page (Black)

As fast as 7.1 seconds

## Time to First Page (Color)

As fast as 8.2 seconds

## Duplex (2-sided) Printing

Integrated Duplex

## Print Resolution, Black

1200 x 1200 dpi, 4800 Color Quality

## Print Resolution, Color

1200 x 1200 dpi, 4800 Color Quality

## Copy Speed (Letter, Black)

Up to 35 cpm<sup>4</sup>

## Copy Speed (Letter, Color)

Up to 35 cpm<sup>4</sup>

## Copy Speed (Letter, Black) Duplex

Up to 35 spm<sup>4</sup>

## Copy Speed (Letter, Color) Duplex

Up to 35 spm<sup>4</sup>

## Time to First Copy (Black)

As fast as 9 seconds

## Time to First Copy (Color)

As fast as 10.1 seconds

## Reduce / Enlarge Range

25 - 400 %

## A4/Ltr Simplex Scan Speed (Black)

Up to 100/100 sides per minute

## A4/Ltr Simplex Scan Speed (Color)

Up to 100/100 sides per minute

## A4/Ltr Duplex Scan Speed (Black)

Up to 200/200 sides per minute

## A4/Ltr Duplex Scan Speed (Color)

Up to 200/200 sides per minute

## Scan Area, Maximum

11.69 x 17.0 inches

## ADF Scan

DADF (single pass Duplex)

## Scanner Type

Flatbed scanner with automatic document feeder

## Scan Resolution, Enhanced

Up to 600 X 600 dpi

## Scan Resolution, Optical

Up to 600 dpi

## Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, Archival PDF (A-1a, A-1b), Searchable PDF, TXT, RTF, DOCX

## Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer

## Processor Speed

Quad Core, 1.2 GHz

## Memory, Standard

4 GB

## Memory, Maximum

4 GB

## Hard Disk

Intelligent Storage Drive included; Magnetic Hard Disk (optional)

## Apple Operating Systems Supported

Support is provided through AirPrint and AirScan only

## Citrix MetaFrame

Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Foundation running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Essentials running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Standard running Citrix XenApp 6.0, 6.5

## Linux Operating Systems Supported

Ubuntu 20.04, Debian 10, SUSE Linux Enterprise Server 12 SP5, OpenSUSE 15.2, Debian 11, Ubuntu 22.04, Fedora 36, Fedora 37, SUSE Linux Enterprise Server 15 SP4, OpenSUSE 15.4, Red Hat Linux 8.7, Red Hat Linux 9.1

## Microsoft Windows Operating Systems Supported

Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11

## Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64) 3, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

## Other Operating Systems Supported

Virtually any platform supporting TCP/IP

## Included Paper Handling

550-Sheet Tray, 150-Sheet Multipurpose Feeder, 500-Sheet Output Bin

## Optional Paper Handling

550-Sheet Tray, Offset Stacker, 500-Sheet Staple Offset Finisher, 2 x 550-Sheet Tray, 2000-Sheet Tandem Tray, Cabinet, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, Folding Paper Transport Unit, 1,250-Sheet Staple Hole Punch Finisher, 2,250-Sheet Booklet Staple Hole Punch Finisher

## Paper Input Capacity, Standard

Up to 700 pages 20 lb or 75 gsm bond

## Paper Input Capacity, Maximum

Up to 4750 pages 20 lb or 75 gsm bond

## Paper Output Capacity, Standard

Up to 500 pages 20 lb or 75 gsm bond

## Paper Output Capacity, Maximum

Up to 2650 pages 20 lb or 75 gsm bond

## Paper Weight Range Supported - Standard Tray (lb.)

16 - 80 lb.

## Paper Weight Range Supported - Multipurpose Feeder (lb.)

16 - 80 lb.

## A3 / 11 x 17

Yes

## ADF

200-Sheet Automatic Document Feeder

**ADF Paper Input Capacity**

Up to 200 pages 20 lb or 75 gsm bond

**ADF Paper Output Capacity**

Up to 200 pages 20 lb or 75 gsm bond

**Finishing Option**

Yes

**Finishing Functions**

Offset stacking, Stapling, Hole punching

**Number of Paper Inputs, Standard**

2

**Number of Paper Inputs, Maximum**

6

**Media Types Supported**

Card Stock, Envelopes, Glossy Paper, Labels, Plain Paper, Vinyl Labels, Refer to the Paper & Specialty Media Guide

**Media Sizes Supported**

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Oficio, A6, SRA3, 12 x 18"

**Standard Ports**

USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon

**Optional Local Ports**

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

**Optional Network Ports**

MarkNet N8230 Fiber Ethernet Print Server

**Direct USB**

Yes

**Ethernet Network**

Yes

**Wireless**

Yes

**Wireless Network**

WPA2™ - Personal, WPA™ and WPA2™ - Personal, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS

**Network Protocol Support**

TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, IPv4, IPv6

**Network Printing Methods**

Direct IP (Port 9100), Enhanced IP (Port 9400), FTP, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing, Thin Print, LPR

**Network Management Protocols**

WINS, APIPA (AutoIP), DHCP, DNS, DDNS, mDNS, ARP, BOOTP

**Network Security**

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, Certificate Management, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, TCP Restricted Server List, IPSEC Support (IPv4/IPv6)

**Printable Area**

0.16 inches of the top, bottom, right and left edges (within)

**Printer Languages (Standard)**

PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCLm, PCL 5 Emulation

**Fonts and Symbol Sets**

39 scalable PPDS fonts, 5 PPDS bitmap fonts, 2 PCL 5/6 bitmap fonts, 163 scalable PostScript fonts, 94 scalable PCL 5/6 fonts

**Laser Cartridge Yields (up to)<sup>3</sup>**

, 46,900-page Color (CMY) Cartridges, 47,700-page Black Cartridge

**Imaging Unit Estimated Yield**

Up to 225,000 (black) and 250,000 (color) pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage for CS/CX96x, CX83x, CX95x, and MX95x printer series, or based on 3 average letter/A4 size pages per print job and ~ 5% coverage for all other printers

**Cartridge(s) Shipping with Product**

5,000-page Black and Color (CMYK) Toner Cartridges

**Replacement Cartridges:**

Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/](http://www.lexmark.com/) regions for more details.

**Packaged Size (in. - H x W x D)**

42.5 x 29.1 x 30.9 in.

**Packaged Weight (lb.)**

225.5 lb.

**Size (in. - H x W x D)**

31.9 x 23.3 x 26.0 in.

**Weight (lb.)**

180.2 lb.

**Noise Level, Idle**

14 dBA

**Noise Level (Print), Operating**

46 dBA

**Duplex Print Noise Level, Operating**

47 dBA

**Noise Level (Copy), Operating**

47 dBA

**Noise Level (Scan), Operating**

42 dBA

**ENERGY STAR**

Yes

**Average Power (Hibernate Mode)**

0.2 watts

**Average Power (Sleep Mode)**

1 watts

**Average Power (Ready Mode)**

60 watts

**Average Power (Printing)**

601 watts

**ENERGY STAR Typical Electricity Consumption (TEC)**

0.55 kilowatt-hours per week

**Product Certifications**

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, UL, cUL, FDA/CDRH, IEC 60825-1, CB Certified, ISO-532B, CE (EU) DoC, RCM DoC, UKCA DoC, Blue Angel DE-UZ 219, UL-AR, GS Mark, ISO-9296, Mopria Certified®, EPEAT Gold

**Maximum Monthly Duty Cycle**

Up to 100 000 pages per month<sup>2</sup>

**Recommended Monthly Page Volume**

4000 - 20000 pages<sup>1</sup>

**Specified Operating Environment**

Humidity: 15 to 80% Relative Humidity, Altitude: 0 - 2896 Meters (9,500 Feet), Temperature: 10 to 32.2°C (50 to 90°F)

**Country of Origin**

North America & TAA Compliant - Mexico, Rest of World - PRC

**UNSPSC Code**

43212110

**Harmonized Tariff Code**


8443.31.0000

<sup>1</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

<sup>2</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

<sup>3</sup>Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

<sup>4</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

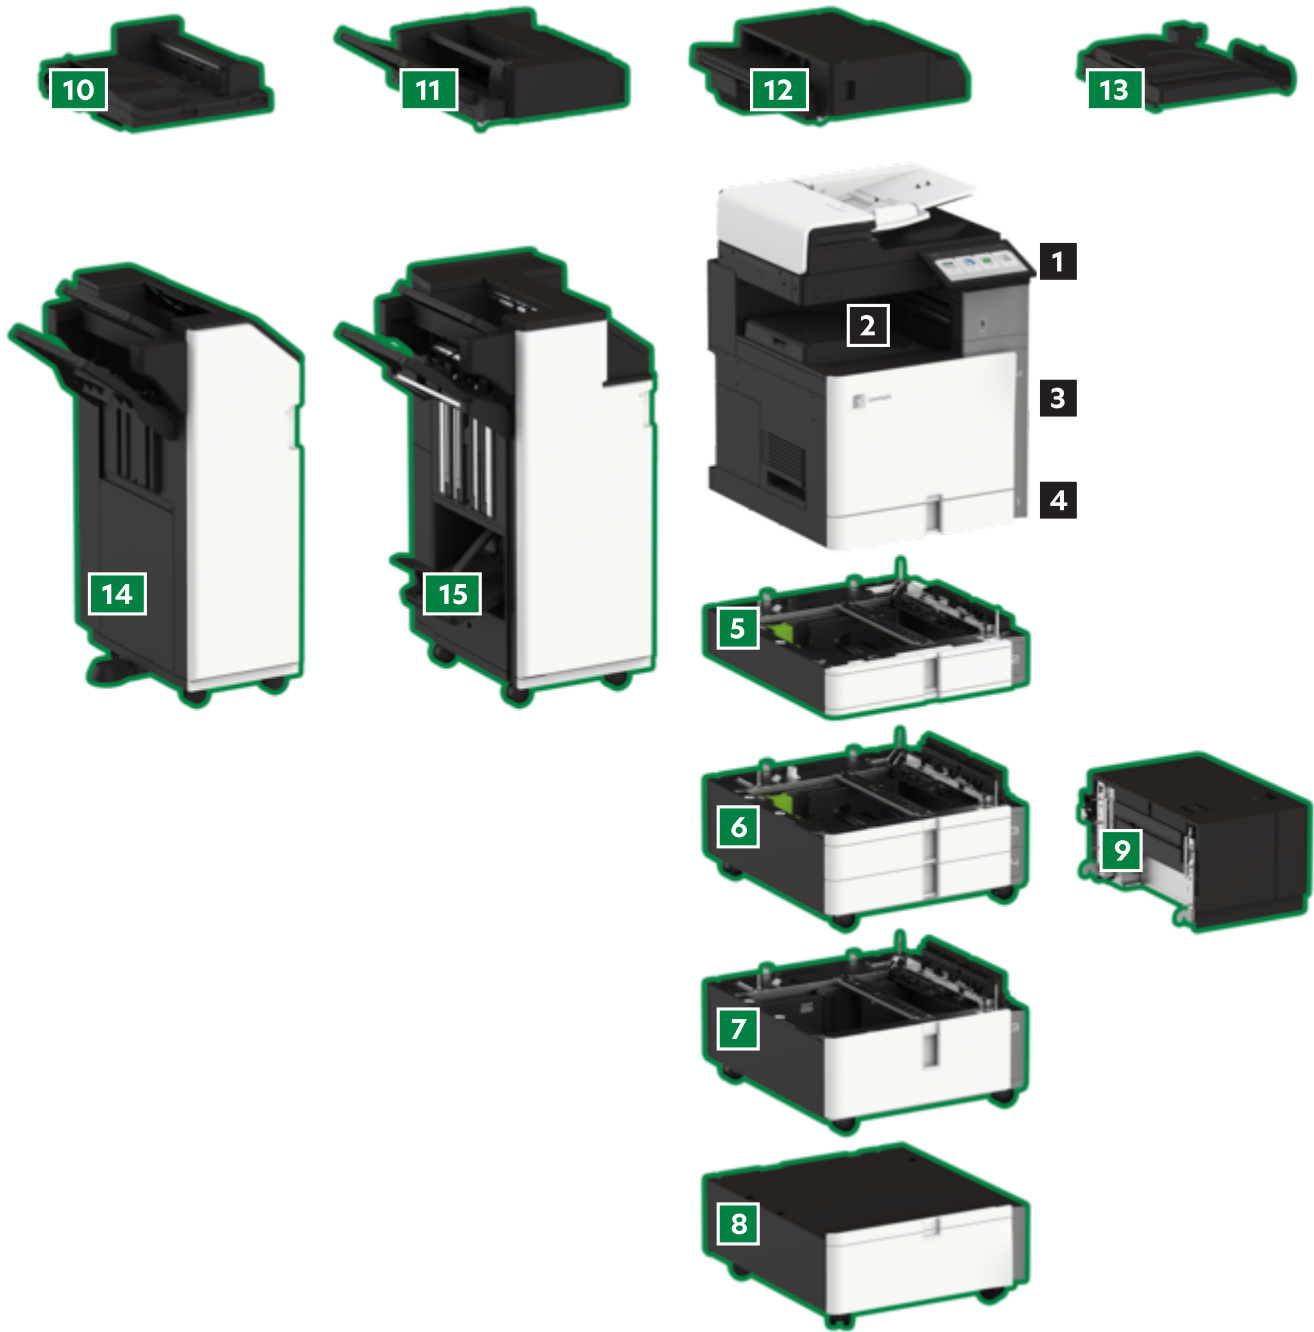

Callout	Availability	Description
1	Standard	10.1-inch (25.6 cm) Color Touch Screen
10	Optional	Paper Transport Unit
11	Optional	Folding Paper Transport Unit
12	Optional	500-Sheet Staple Finisher
13	Optional	Offset Stacker
14	Optional	1,250-Sheet Staple Hole Punch Finisher
15	Optional	2,250-Sheet Booklet Staple Hole Punch Finisher
2	Standard	500-Sheet Output Bin
3	Standard	150-Sheet Multipurpose Feeder
4	Standard	550-Sheet Tray
5	Optional	
6	Optional	2 x 550-Sheet Tray
7	Optional	2,000-Sheet Tandem Tray
8	Optional	Cabinet
9	Optional	1,500-Sheet High-Capacity Tray