



Lexmark CS963e

With the new CS963e color A3 printer, you get reassuring versatility, exceptional sustainability, and surprising simplicity from such sophisticated technology. Boost your productivity with vivid prints — up to 55 pages per minute*. Intuitively navigate the 4.3-inch color touchscreen, and save money by avoiding the use of outside print shops.

Print Technology

Color Laser

Function

Printing, Trusted Platform Module (TPM), The Trusted Platform Module (TPM) is not available in some countries.

Workgroup Size

Large Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 4.3-inch color touch screen

Print Speed (Letter, Black)

Up to 55 ppm⁴

Print Speed (Letter, Color)

Up to 55 ppm⁴

Print Speed (Letter, Black) Duplex

Up to 55 ppm⁴

Print Speed (Letter, Color) Duplex

Up to 55 ppm⁴

Time to First Page (Black)

As fast as 7 seconds

Time to First Page (Color)

As fast as 8.1 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 x 1200 dpi, 4800 Color Quality

Print Resolution, Color

1200 x 1200 dpi, 4800 Color Quality

Processor Speed

Quad Core, 1.2 GHz

Memory, Standard

4 GB

Memory, Maximum

4 GB

Hard Disk

Intelligent Storage Drive (optional); Magnetic Hard Disk (optional)

Apple Operating Systems Supported Support is provided through AirPrint and AirScan only

Citrix MetaFrame

Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Foundation running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Essentials running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Standard running Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

Ubuntu 20.04, Debian 10, SUSE Linux Enterprise Server 12 SP5, OpenSUSE 15.2, Debian 11, Ubuntu 22.04, Fedora 36, Fedora 37, SUSE Linux Enterprise Server 15 SP4, OpenSUSE 15.4, Red Hat Linux 8.7, Red Hat Linux 9.1

Microsoft Windows Operating Systems Supported

Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64) 3, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

Other Operating Systems Supported

Virtually any platform supporting TCP/IP

Included Paper Handling

550-Sheet Tray, 150-Sheet Multipurpose Feeder, 500-Sheet Output Bin

Optional Paper Handling

550-Sheet Tray, Offset Stacker, 500-Sheet Staple Offset Finisher, 2 x 550-Sheet Tray, 2000-Sheet Tandem Tray, Cabinet, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, Folding Paper Transport Unit, 1,250-Sheet Staple Hole Punch Finisher, 2,250-Sheet Booklet Staple Hole Punch Finisher

Paper Input Capacity, Standard

Up to 700 pages 20 lb or 75 gsm bond

Paper Input Capacity, Maximum

Up to 4750 pages 20 lb or 75 gsm bond

Paper Output Capacity, Standard

Up to 500 pages 20 lb or 75 gsm bond

Paper Output Capacity, Maximum

Up to 2650 pages 20 lb or 75 gsm bond

Paper Weight Range Supported - Standard Tray (lb.)

16 - 80 lb.

Paper Weight Range Supported - Multipurpose Feeder (lb.)

16 - 80 lb.

A3 / 11 x 17

Yes

Finishing Option

Yes

Finishing Functions

Offset stacking, Stapling, Hole punching, Booklet fold and saddle stapling

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Envelopes, Glossy Paper, Labels, Plain Paper, Vinyl Labels, Refer to the Paper & Specialty Media Guide

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Oficio, A6, SRA3, 12 x 18"

Standard Ports

USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon

Optional Local Ports

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

Optional Network Ports

MarkNet N8230 Fiber Ethernet Print Server

Direct USB

Yes

Ethernet Network

Yes

Wireless

Yes

Wireless Network

WPA2™ - Personal, WPA™ and WPA2™ - Personal, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS

Network Protocol Support

TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, IPv4, IPv6

Network Printing Methods

Direct IP (Port 9100), Enhanced IP (Port 9400), FTP, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing, Thin Print, LPR

Network Management Protocols

WINS, APIPA (AutoIP), DHCP, DNS, DDNS, mDNS, ARP, BOOTP

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, Certificate Management, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, TCP Restricted Server List, IPSEC Support (IPv4/IPv6)

Printable Area

0.16 inches of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCLm, PCL 5 Emulation

Fonts and Symbol Sets

39 scalable PPDS fonts, 5 PPDS bitmap fonts, 2 PCL 5/6 bitmap fonts, 163 scalable PostScript fonts, 94 scalable PCL 5/6 fonts

Laser Cartridge Yields (up to)³

, 46,900-page Color (CMY) Cartridges, 47,700-page Black Cartridge

Imaging Unit Estimated Yield

Up to 225,000 (black) and 250,000 (color) pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage for CS/CX96x, CX83x, CX95x, and MX95x printer series, or based on 3 average letter/A4 size pages per print job and ~ 5% coverage for all other printers

Cartridge(s) Shipping with Product

12,000-page Color (CMY) Toner Cartridges, 15,000-page Black Toner Cartridge

Replacement Cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged Size (in. - H x W x D)

33.5 x 29.1 x 30.9 in.

Packaged Weight (lb.)

184.8 lb.

Size (in. - H x W x D)

25.3 x 23.3 x 26.0 in.

Weight (lb.)

145.8 lb.

Noise Level, Idle

14 dBA

Noise Level (Print), Operating

52 dBA

Duplex Print Noise Level, Operating

55 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.2 watts

Average Power (Sleep Mode)

1.1 watts

Average Power (Ready Mode)

45.5 watts

Average Power (Printing)

811 watts

ENERGY STAR Typical Electricity Consumption (TEC)

0.8 kilowatt-hours per week

Product Certifications

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC /KCC Mark, RCM DoC, ErP - EcoDesign, CCC, UKCA DoC, Blue Angel / DE-UZ 219, CECP, CEL, ECMA-370, TED, SII, TER, UL-AR, GS Mark, ISO-9296, EPEAT Gold, Mopria Certified®

Maximum Monthly Duty Cycle

Up to 270 000 pages per month²

Recommended Monthly Page Volume

7000 - 50000 pages¹

Specified Operating Environment

Humidity: 15 to 80% Relative Humidity, Altitude: 0 - 2896 Meters (9,500 Feet), Temperature: 10 to 32.2°C (50 to 90°F)

Country of Origin

North America & TAA Compliant - Mexico, Rest of World - PRC

UNSPSC Code

43212105

Harmonized Tariff Code


8443.32.1010

¹"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

²"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

³Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

⁴Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

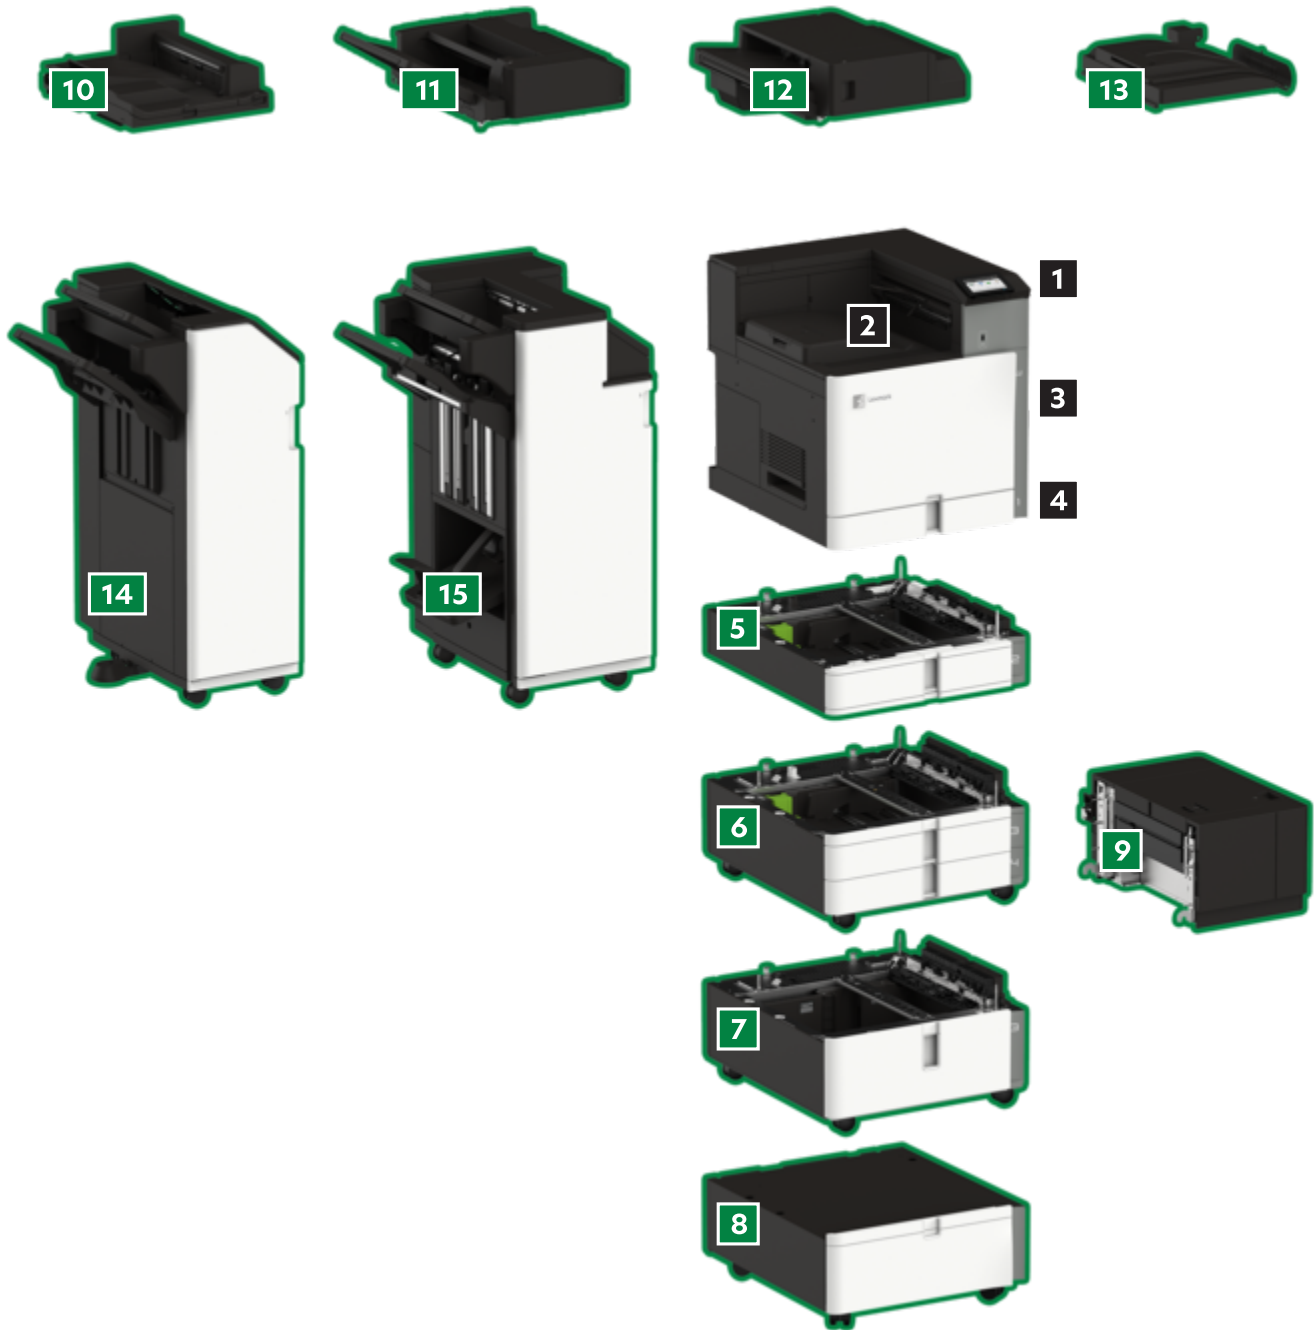

Callout	Availability	Description
1	Standard	4.3-inch (10.9-cm) Touch Screen
10	Optional	Paper Transport Unit
11	Optional	Folding Paper Transport Unit
12	Optional	500-Sheet Staple Finisher
13	Optional	Offset Stacker
14	Optional	1,250-Sheet Staple Hole Punch Finisher
15	Optional	2,250-Sheet Booklet Staple Hole Punch Finisher
2	Standard	500-Sheet Output Bin
3	Standard	150-Sheet Multipurpose Feeder
4	Standard	550-Sheet Tray
5	Optional	
6	Optional	2 x 550-Sheet Tray
7	Optional	2,000-Sheet Tandem Tray
8	Optional	Cabinet
9	Optional	1,500-Sheet High-Capacity Tray